


Changing the Battery - SafeLogic



Step 1:
To remove the EntryPad from the safe door, push up from the bottom of the EntryPad. You will feel the SnapFit mounting holes release from the shoulder bolts



Step 2:
The back of the EntryPad will reveal a 9 volt battery. Remove the battery from its compartment.

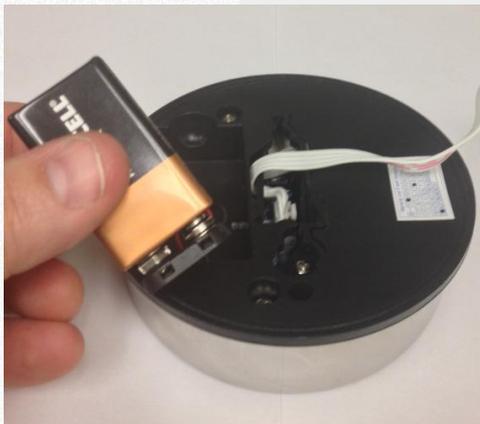

Step 3:
Remove the terminal block from the battery.



Note:
Do not pull on the terminal wires.



Step 4:
Snap a new Duracell or Energizer battery on the terminal block. Place the battery back in its compartment with the terminal block toward the bottom of the EntryPad.